


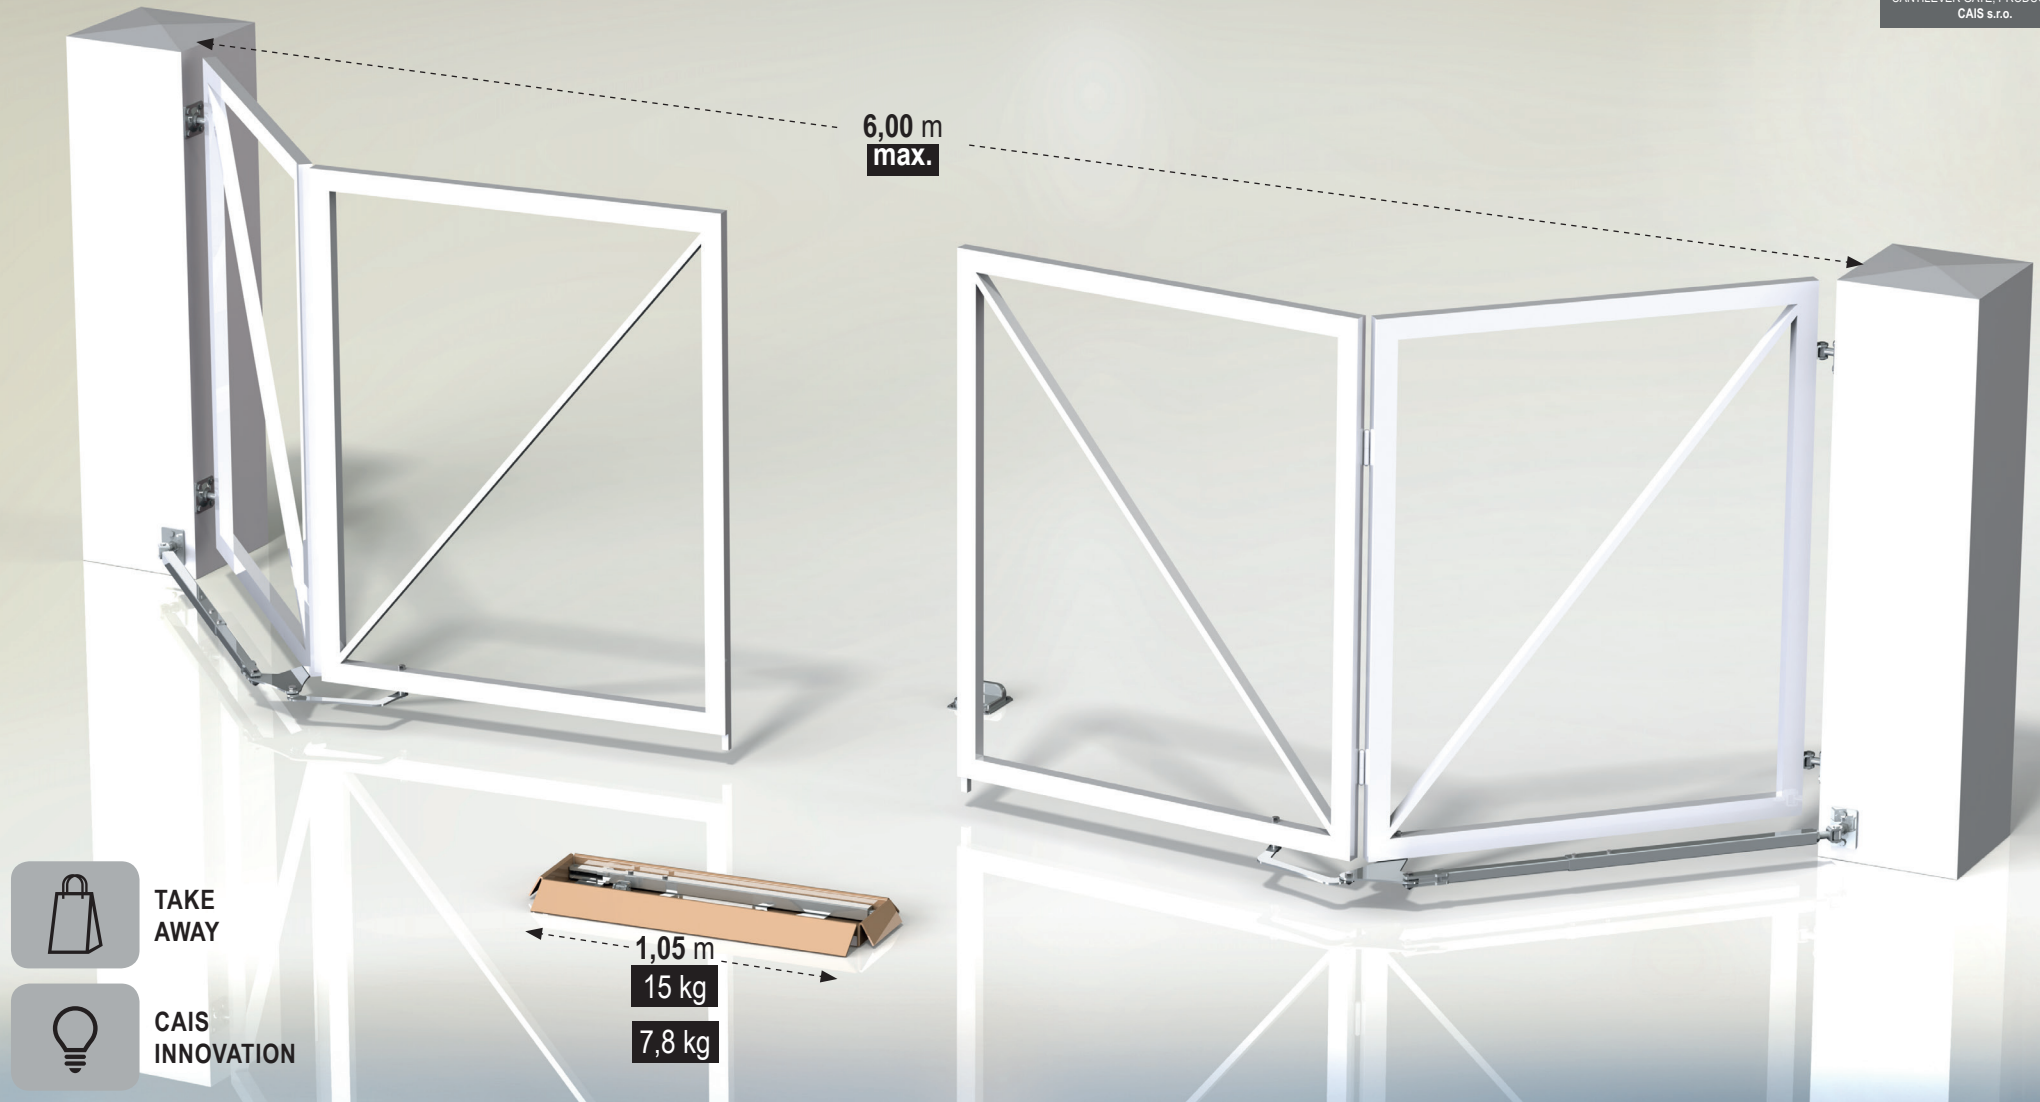

PATENT OFFICE 

 **TWIN DRIVE - MANUAL**

TRACKLESS BI-FOLDING
SWING GATE HARDWARE
SPACE-SAVING FEATURE

TWIN DRIVE 6.0

BI-FOLDING DOUBLE LEAF
SWING GATE HARDWARE
SPACE-SAVING FEATURE
MAX. 3.0 m SINGLE LEAF
SINGLE LEAF MAX. 110 kg
HEIGHT MAX. 1,6 m
CENTRAL HINGES INCLUDED

CODE: 1710901

TWIN DRIVE 3.0

BI-FOLDING SINGLE LEAF
SWING GATE HARDWARE
SPACE-SAVING FEATURE
MAX. 3.0 m SINGLE LEAF
SINGLE LEAF MAX. 110 kg
HEIGHT MAX. 1,6 m
CENTRAL HINGES INCLUDED

CODE: 1710902



NO WELDING
REQUIRED



SPACE SAVING
FEATURE
- 50% OF BACK SPACE



EASY
ASSEMBLY



FAST
NO WELDING
REQUIRED



EASY TELESCOPIC
ADJUSTMENT



SUITABLE FOR
OFFSET LEAFS
100% + 50%



SUITABLE FOR
ALL STANDARD HINGES
WITH A SINGLE AXLE



WIND RESISTANCE
MAX. 50%
LEAF CLOSURE



SUITABLE FOR
ALL STANDARD
AUTOMATIC
GATE OPERATORS



- 37°C
TESTED & PROVEN



+ 50°C
TESTED & PROVEN



TRACKLESS
BI-FOLDING



COMPACT
PACKAGE



EASY
TRANSPORT



FOR RESIDENTIAL
USE ONLY



TAKE
AWAY



HIGH QUALITY
GUARANTEED



CAIS
INNOVATION




90° MAX. ANGLE




BOTTOM FIXED LEAF
SAFETY FEATURE




L max.	A	B	C min. / max	D min. / max.	E	F	G	H	SINGLE LEAF max.
3000	130	90	1000- 1500	300 – 1500	100	250	40	1600	110
									kg

Valid for gate frame 60x40

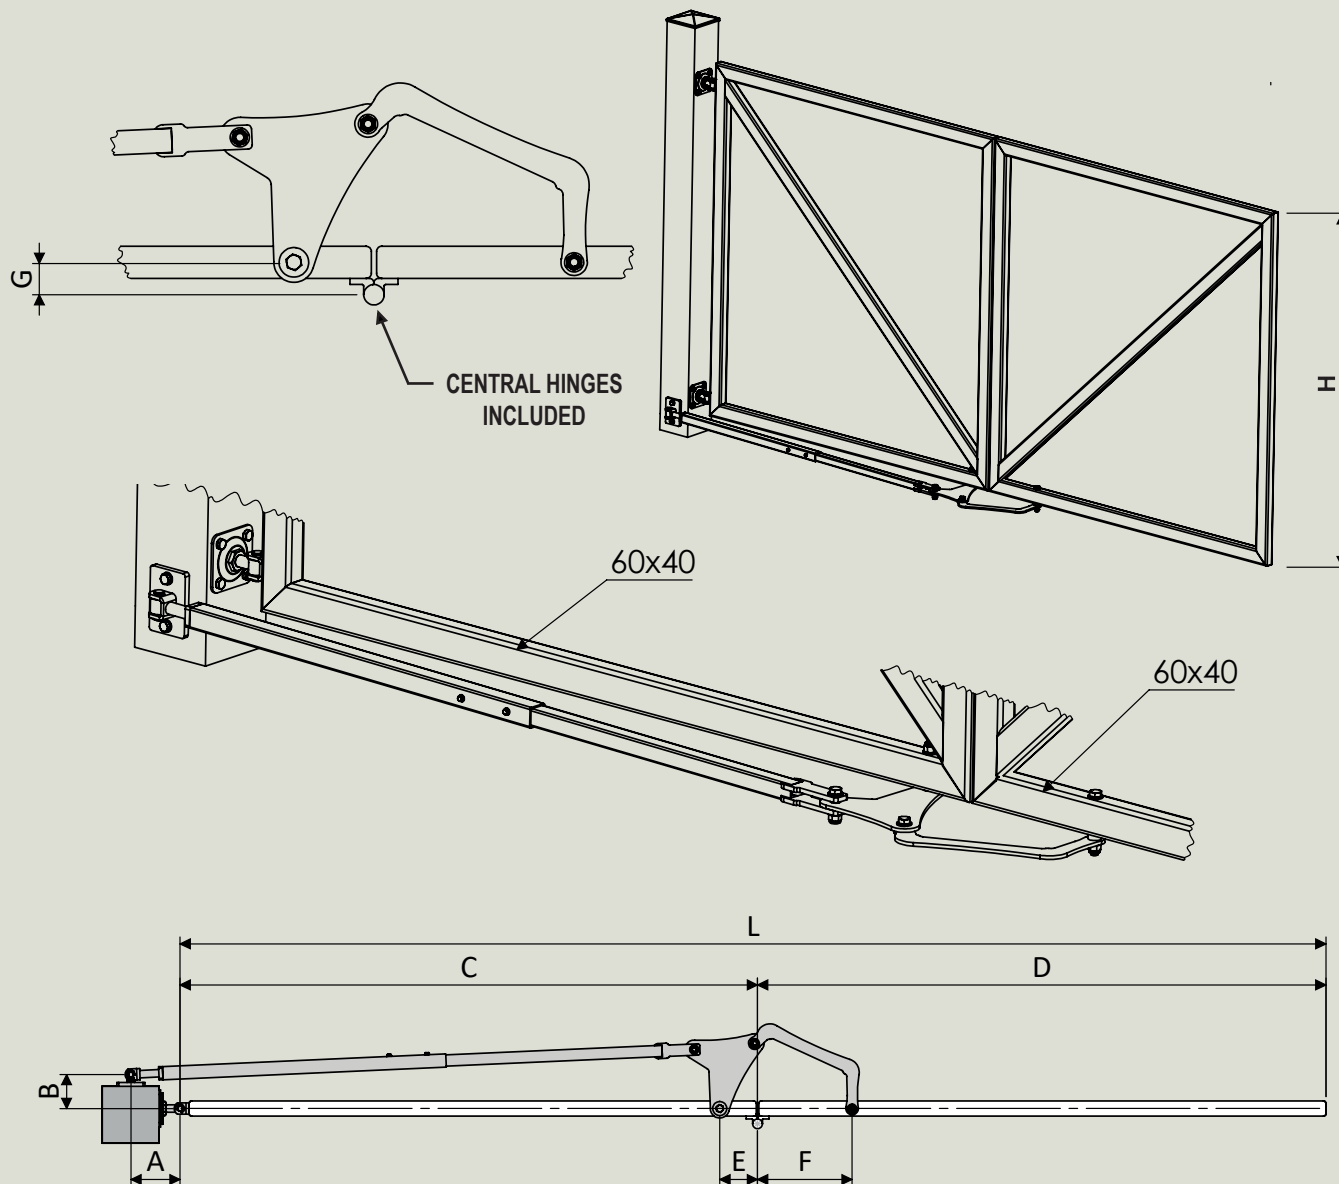





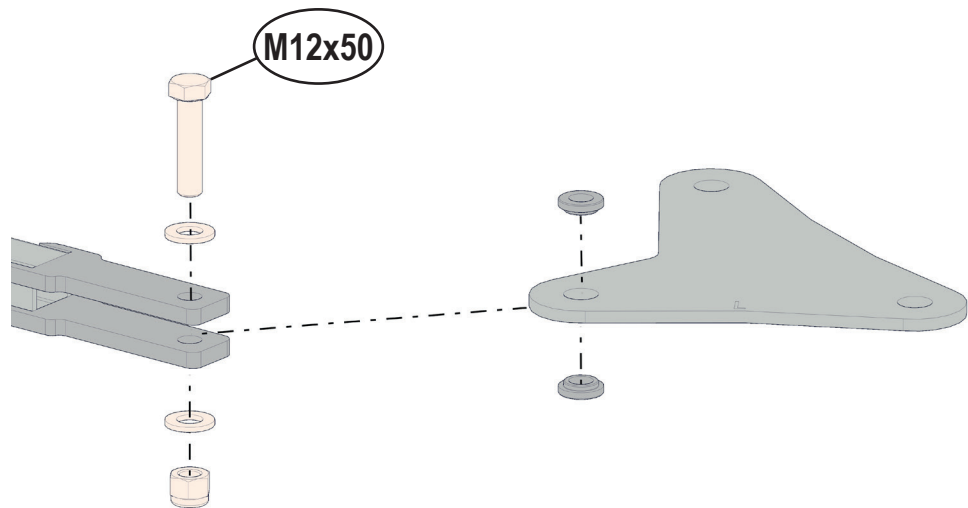




LEFT <<<


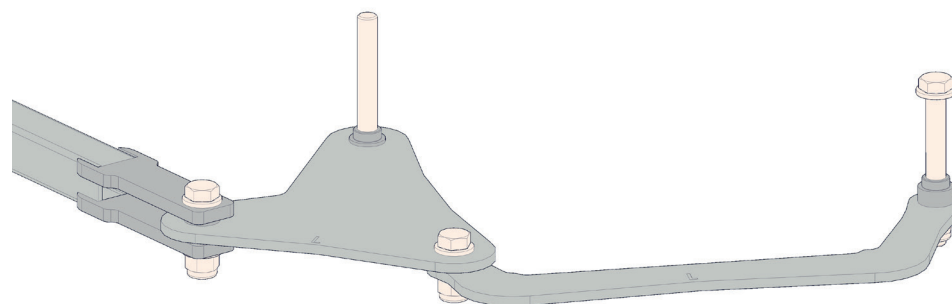
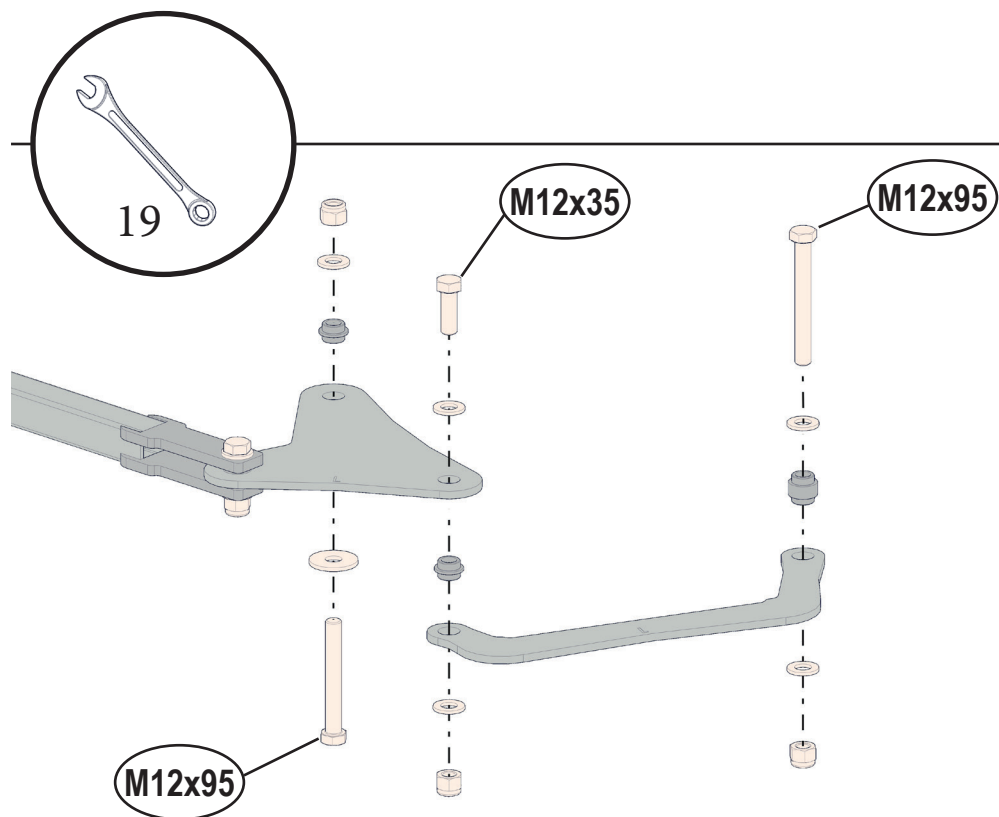
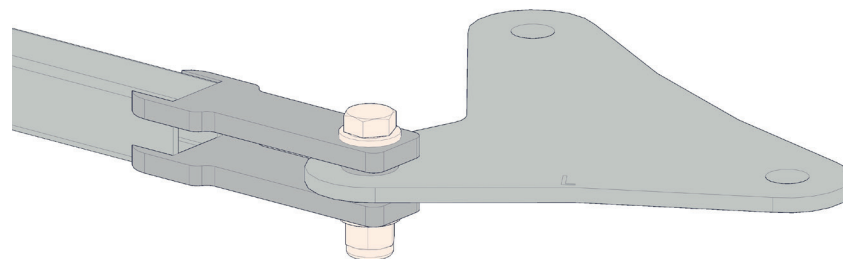





STEP 1 (A) - LEFT





RIGHT >>>

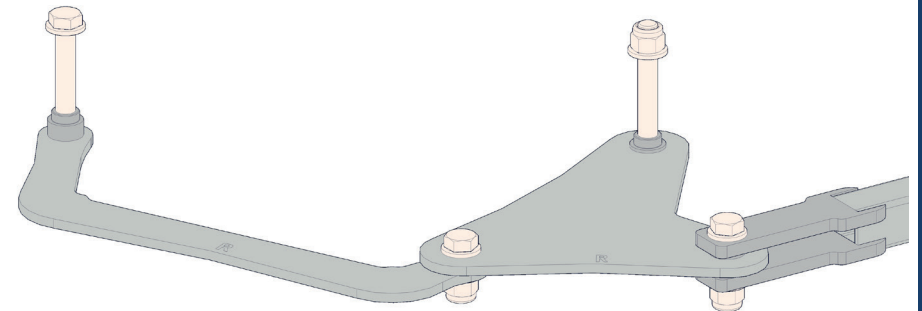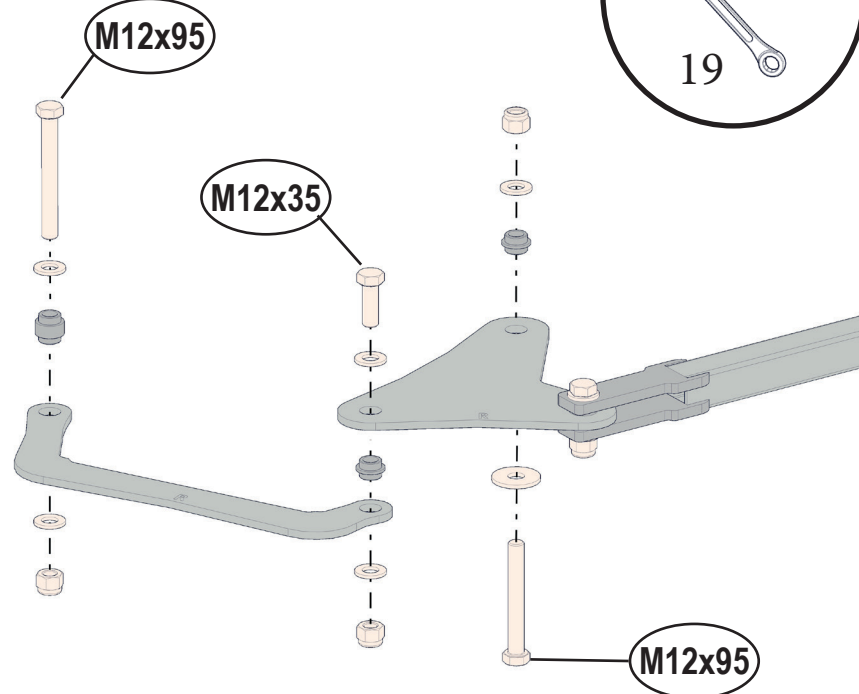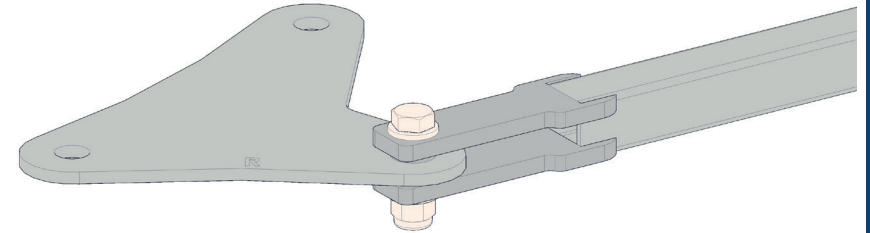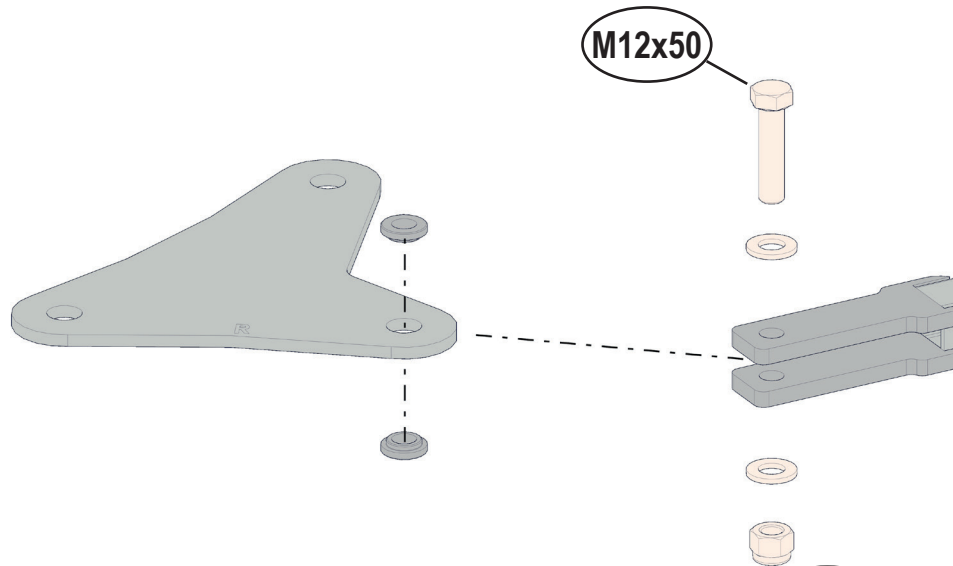


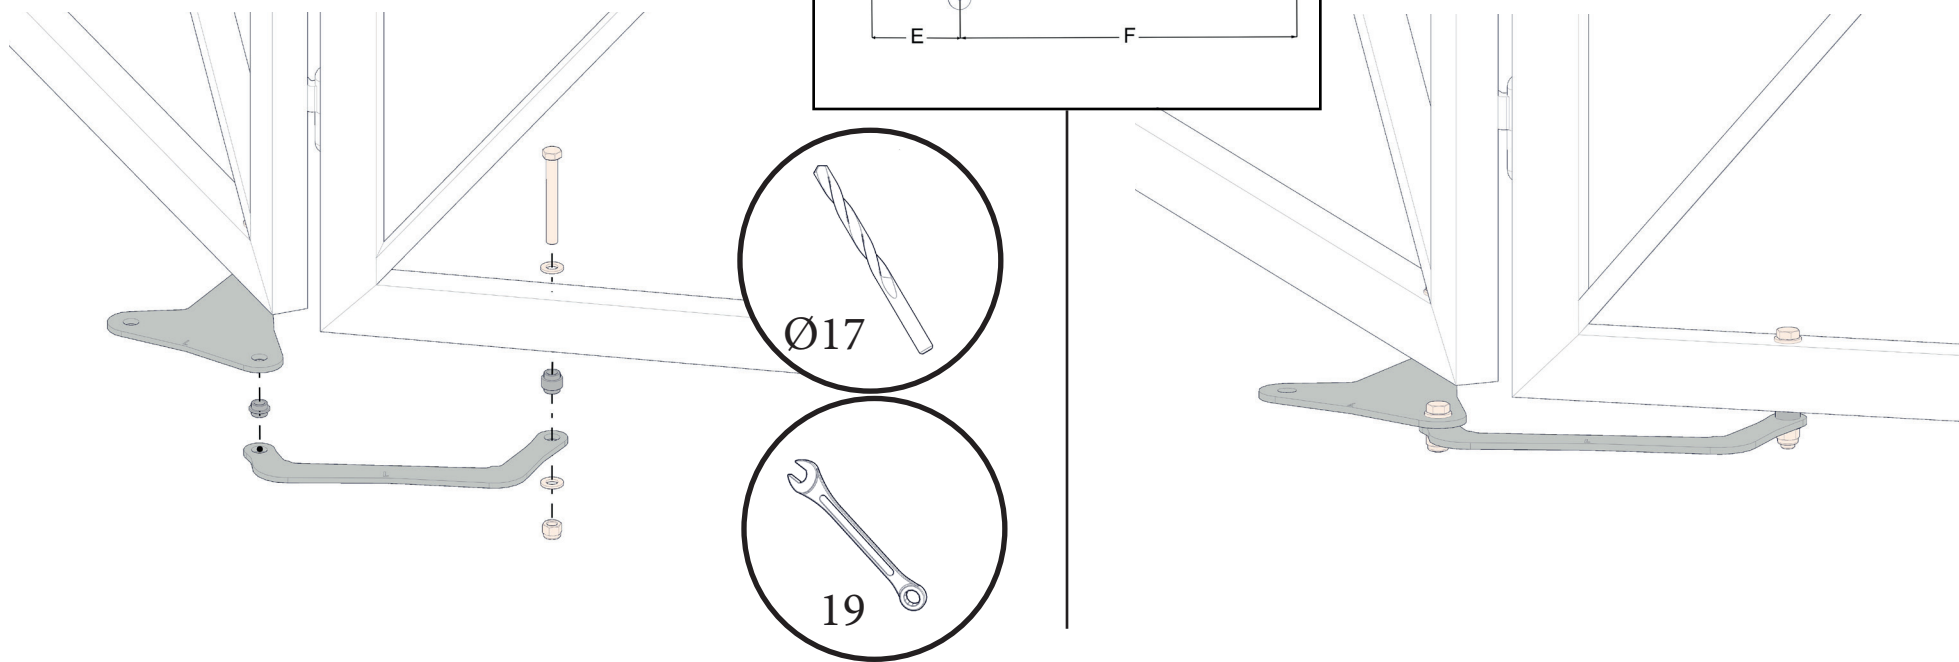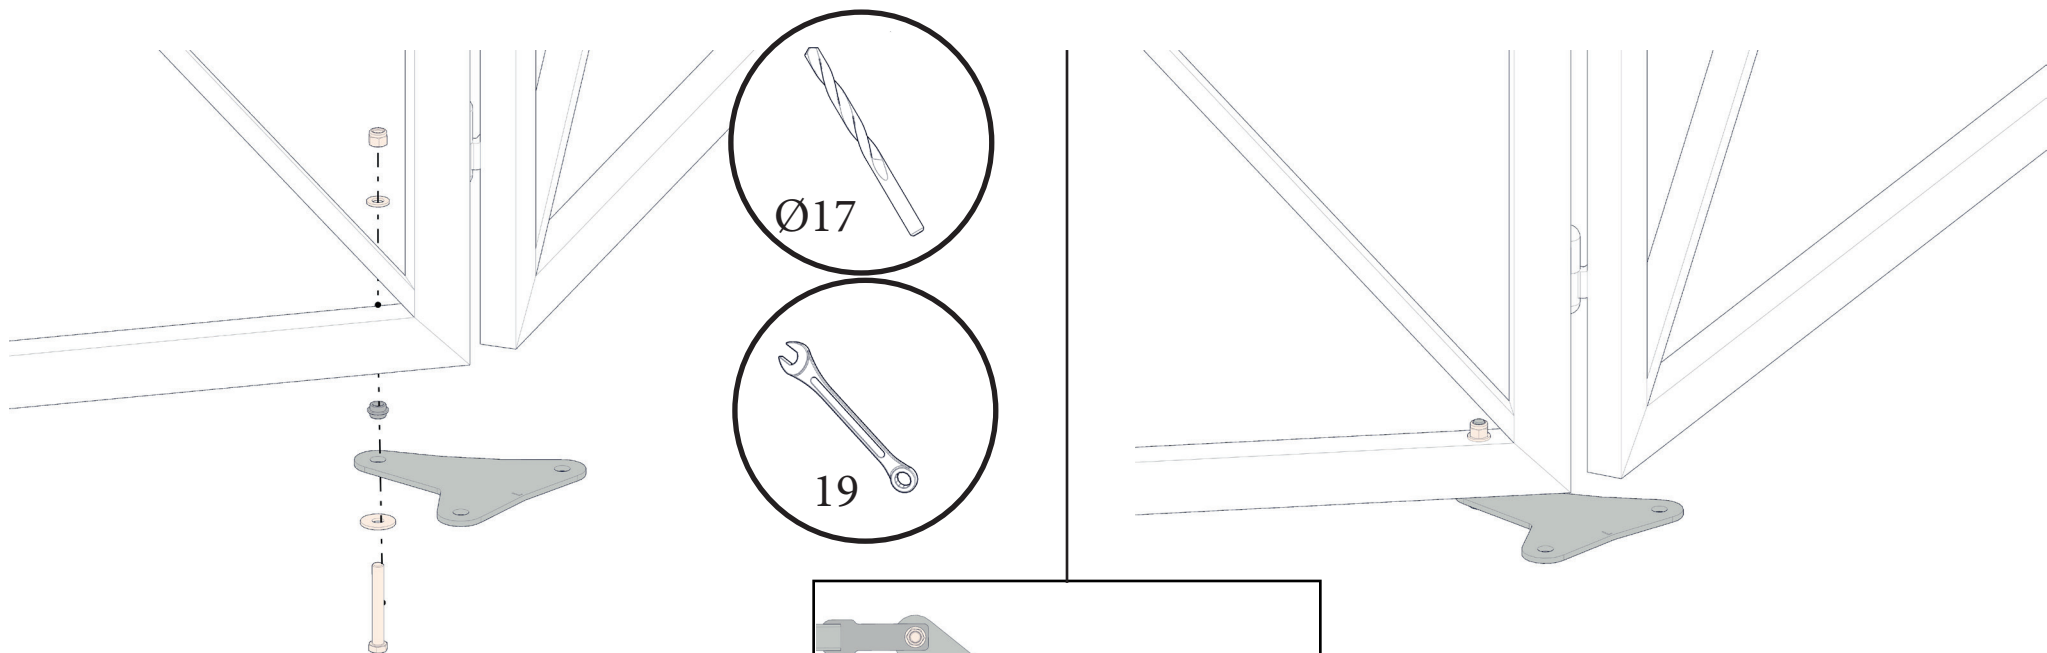

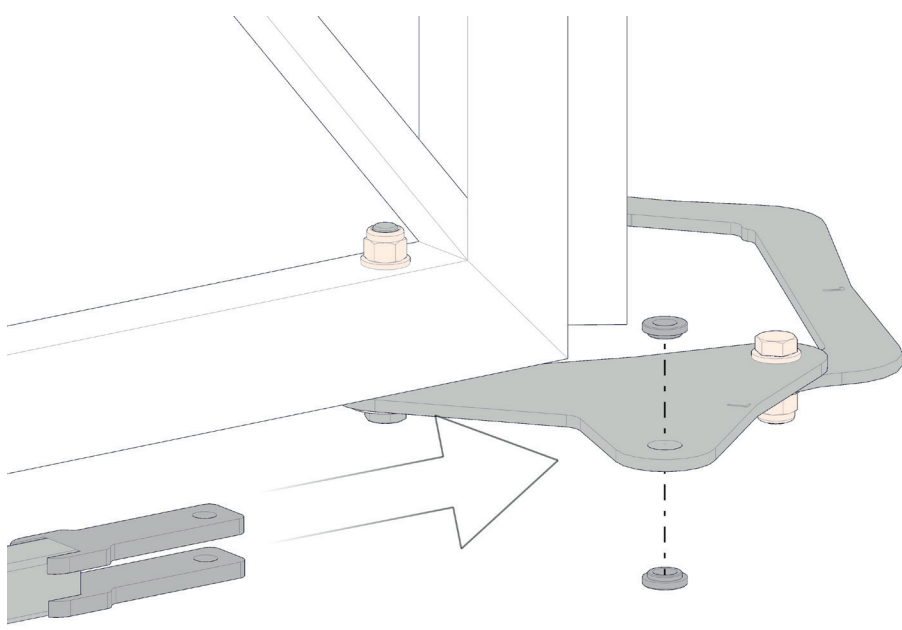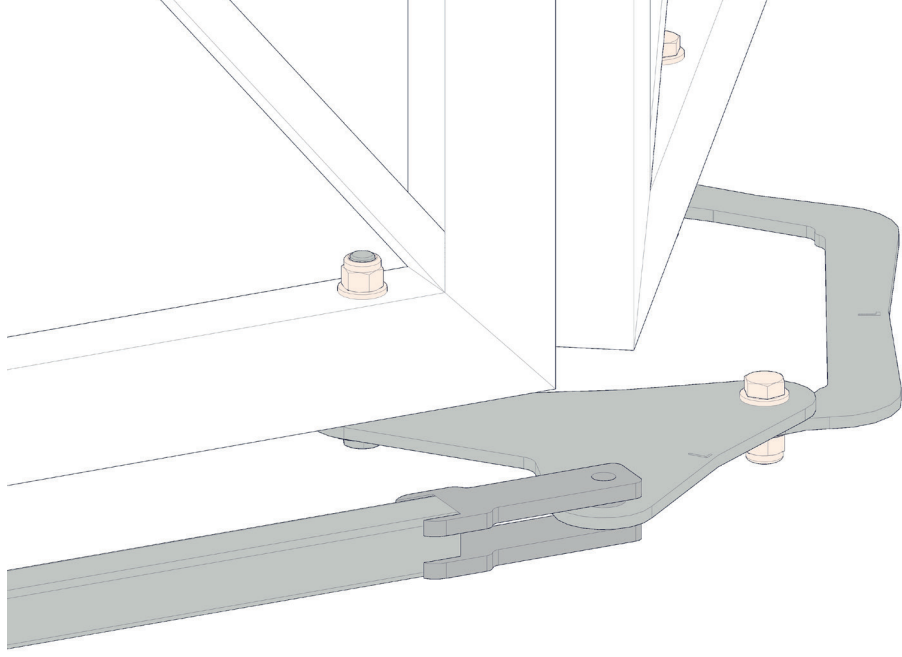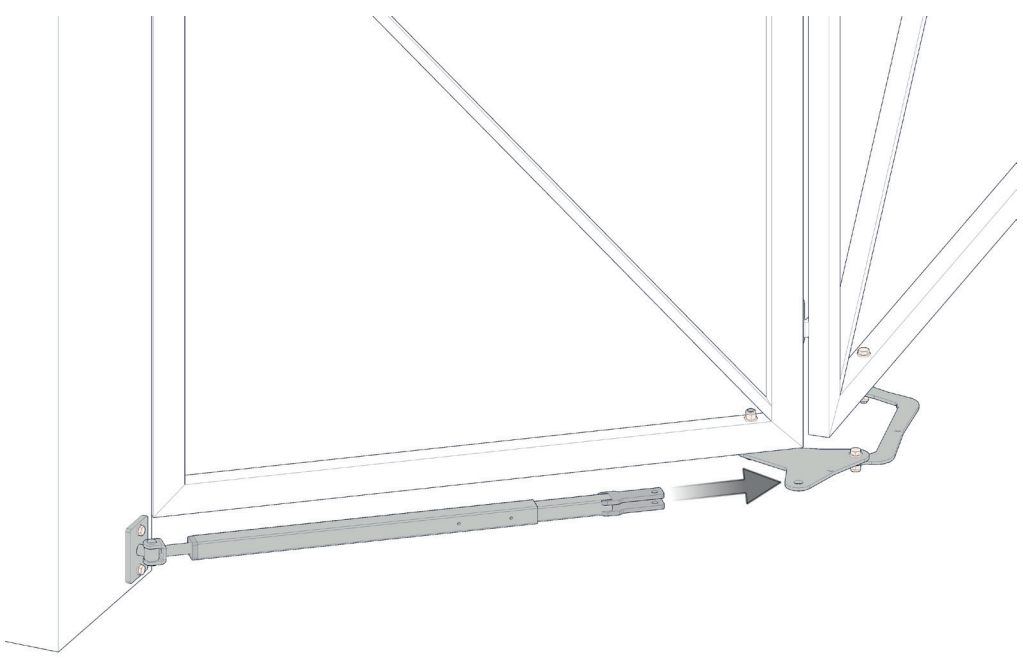
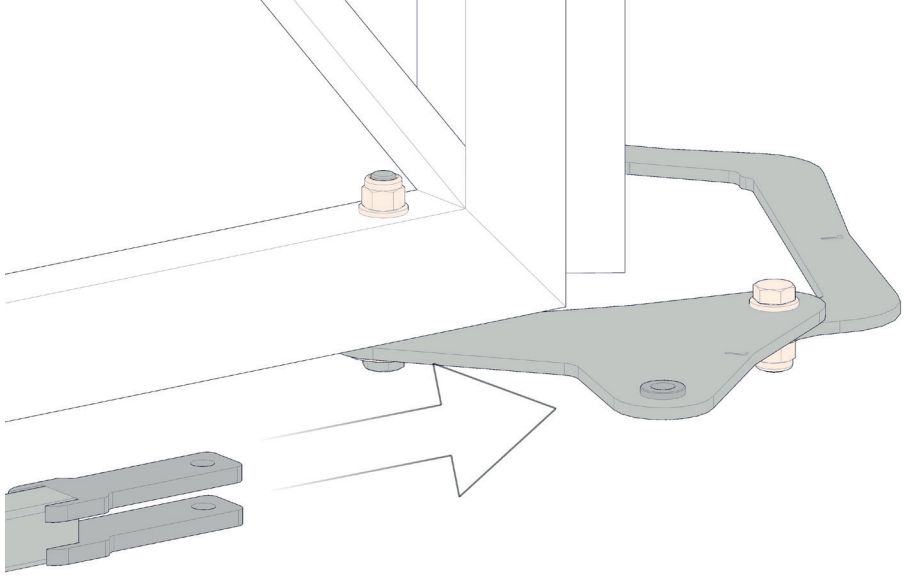


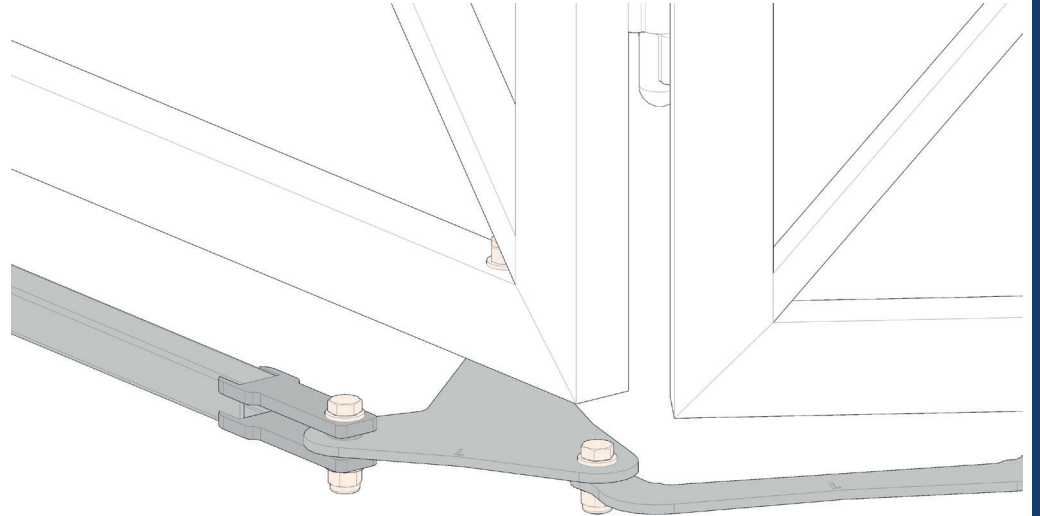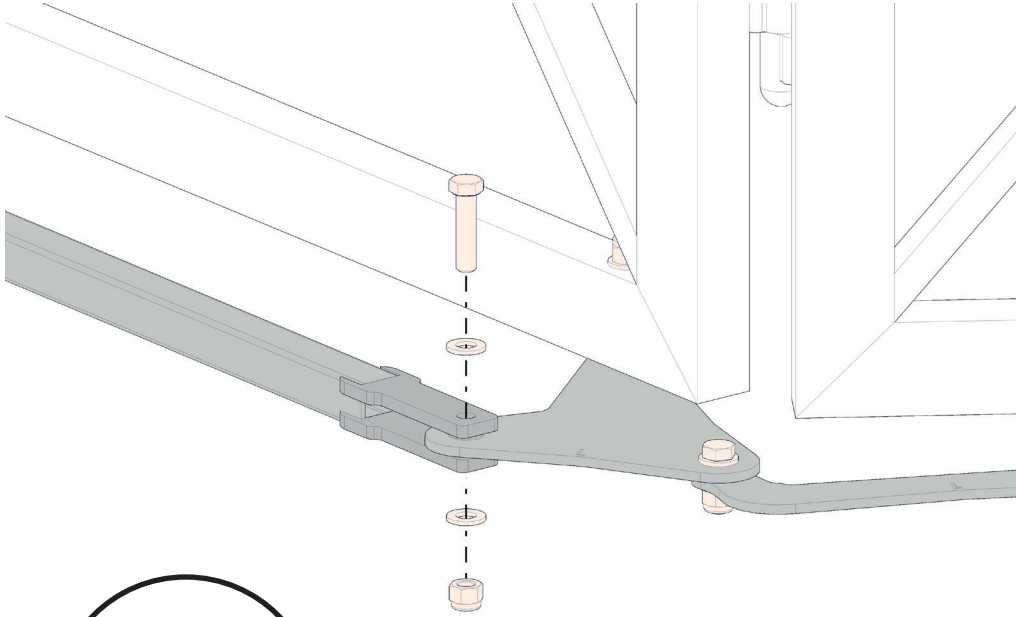

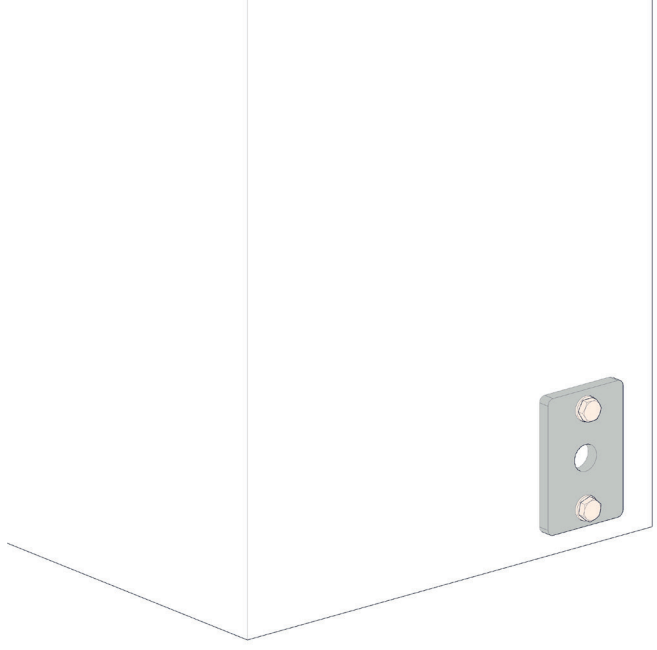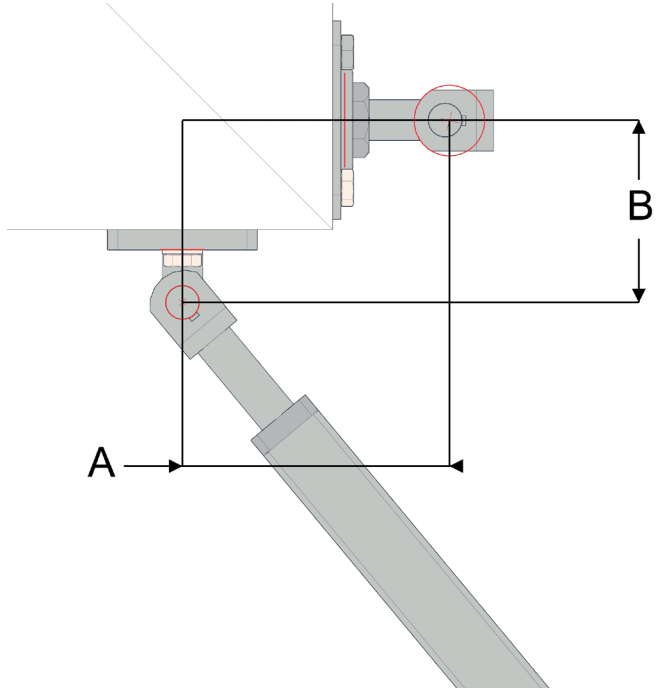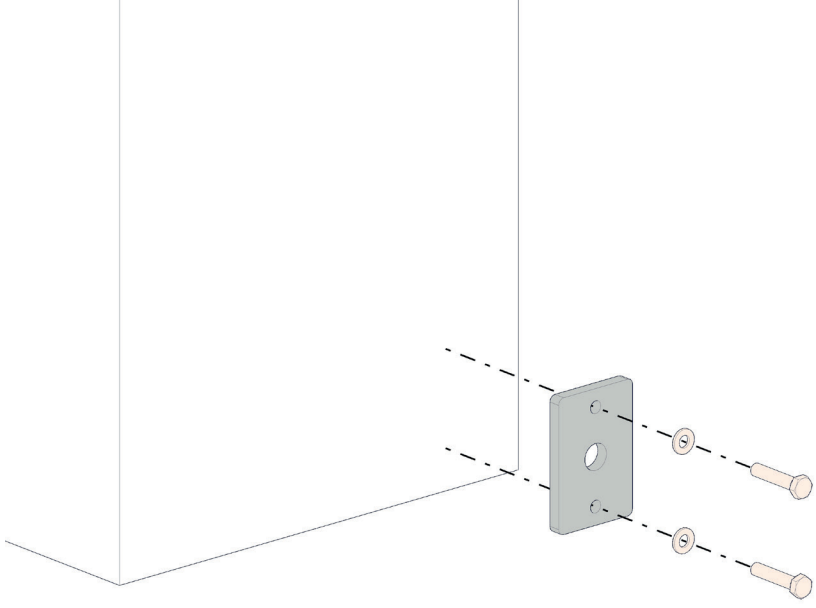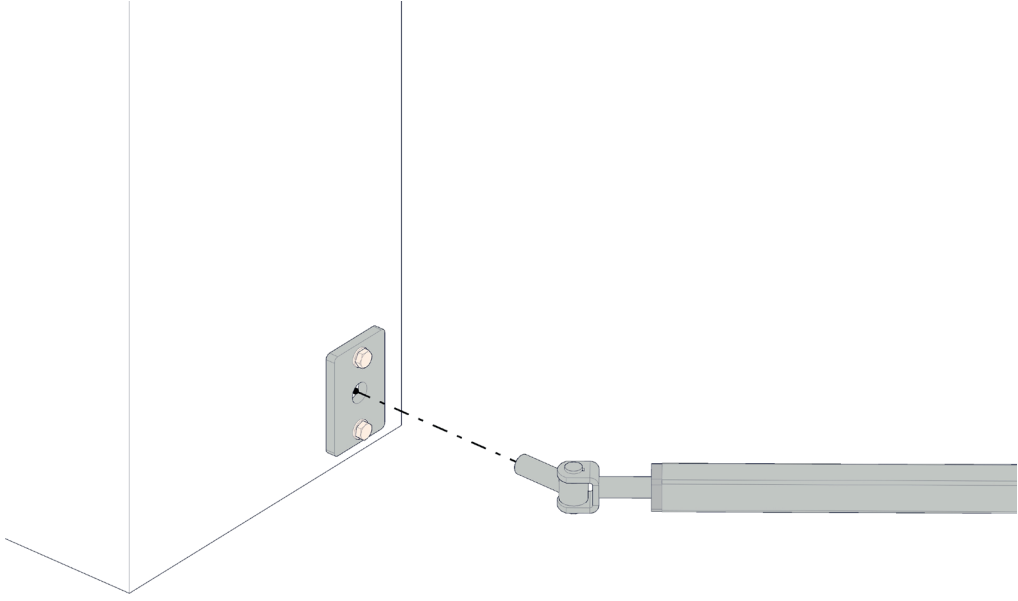


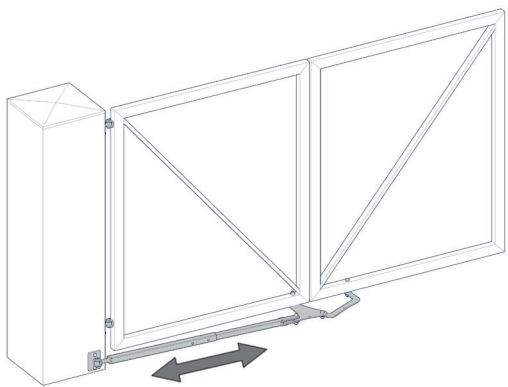



CLOSE

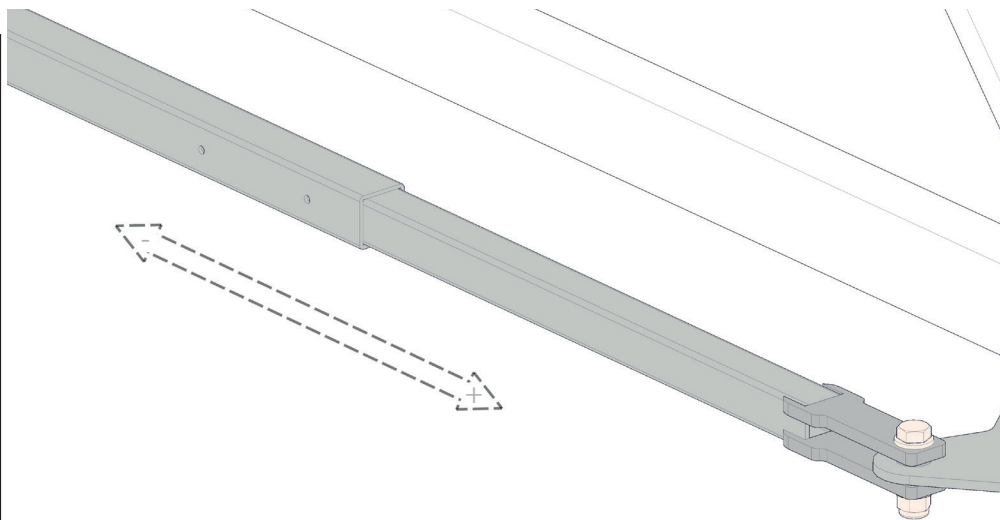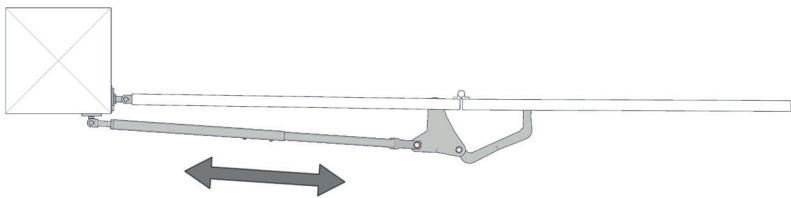



STEP 7

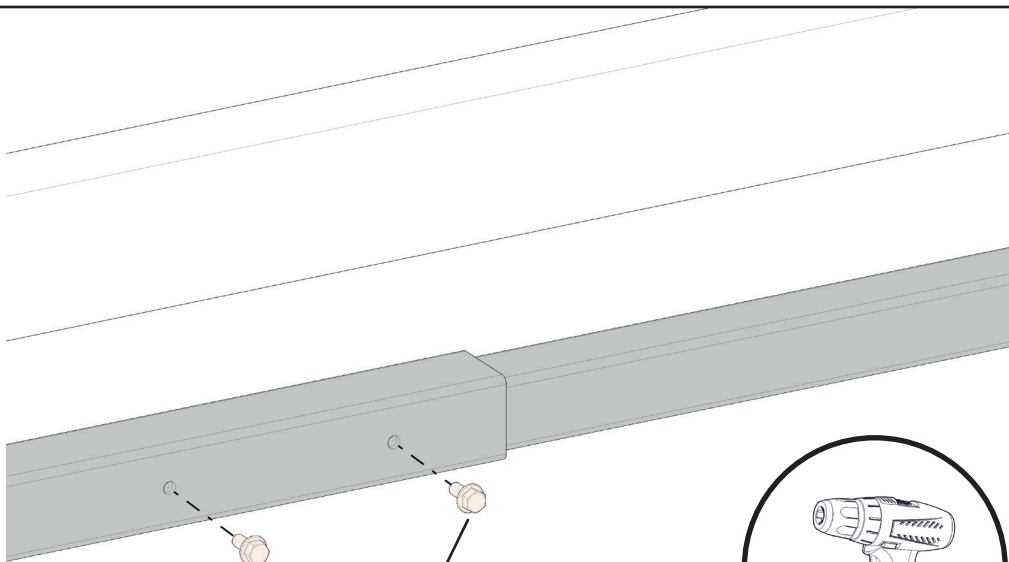



M6,3X19

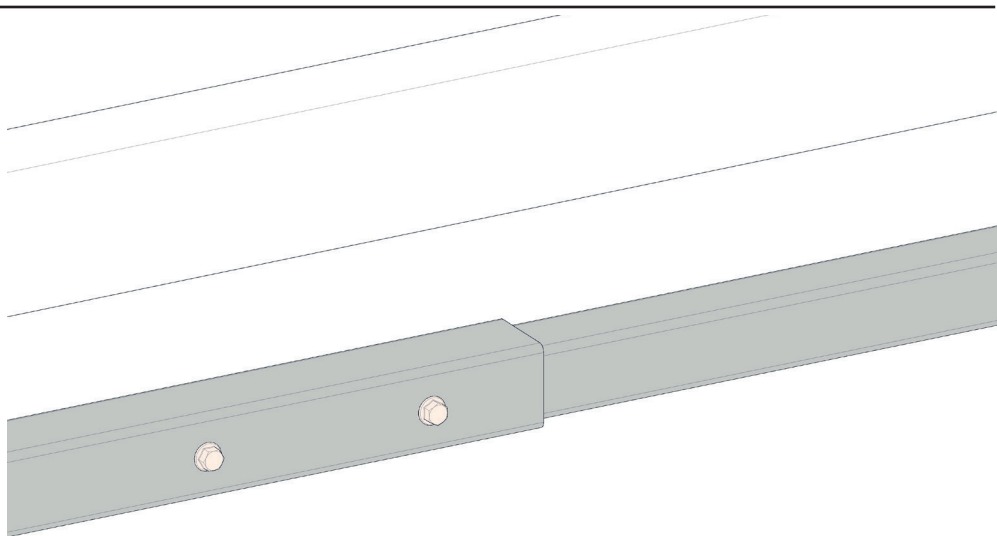

STEP 8

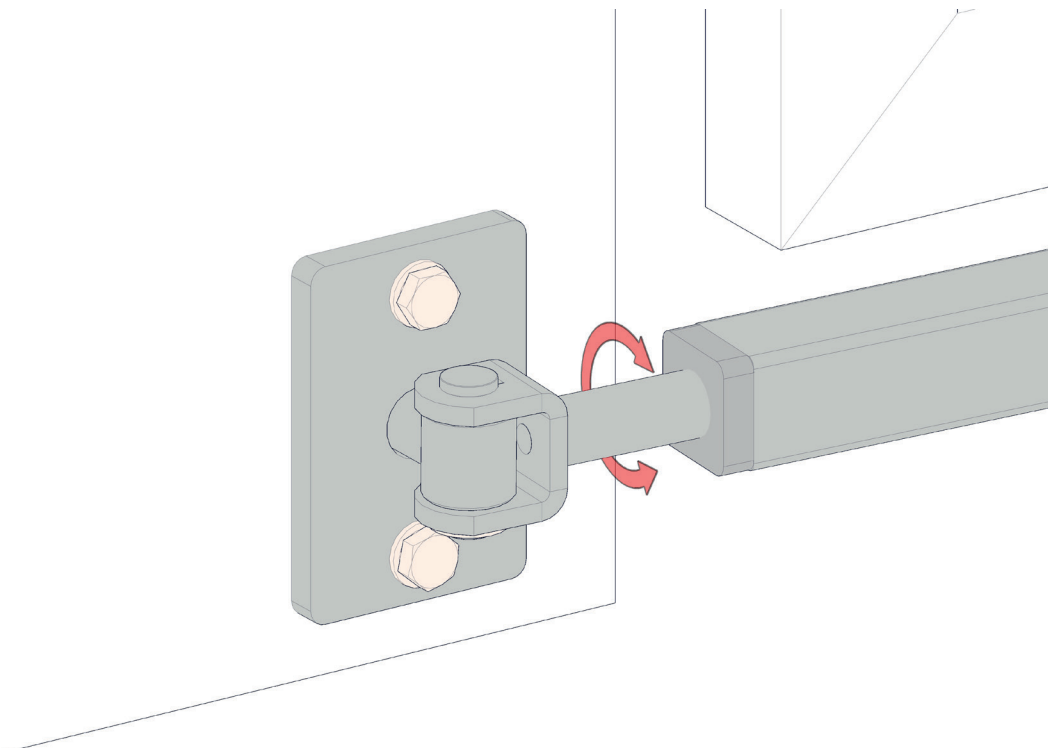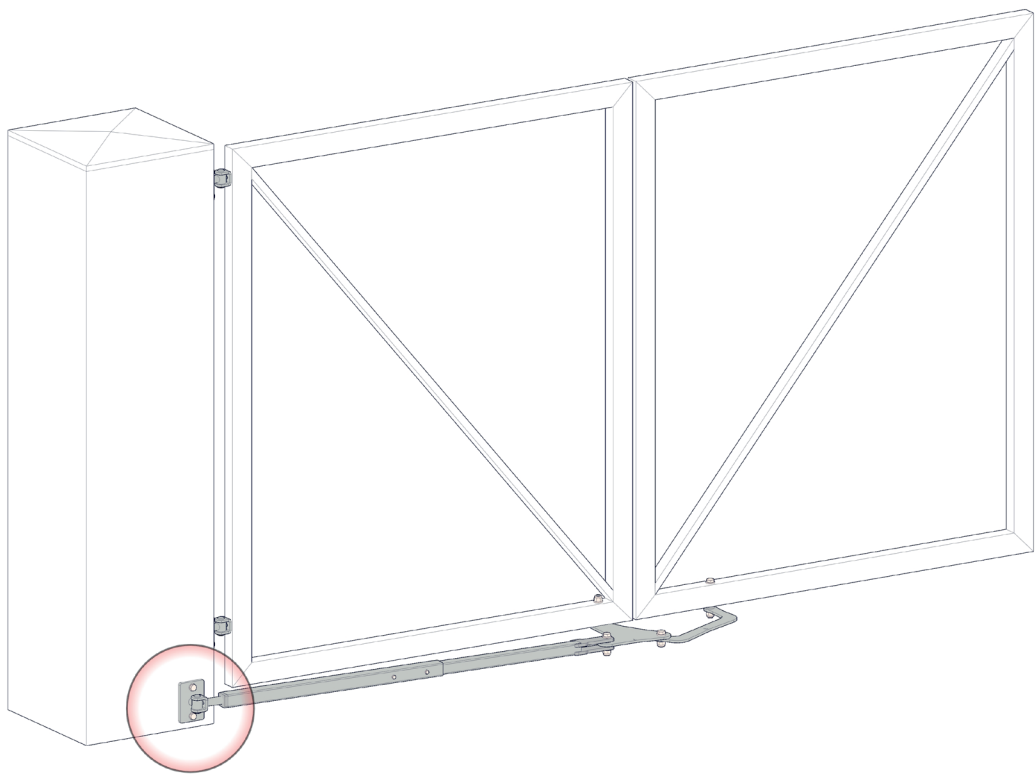

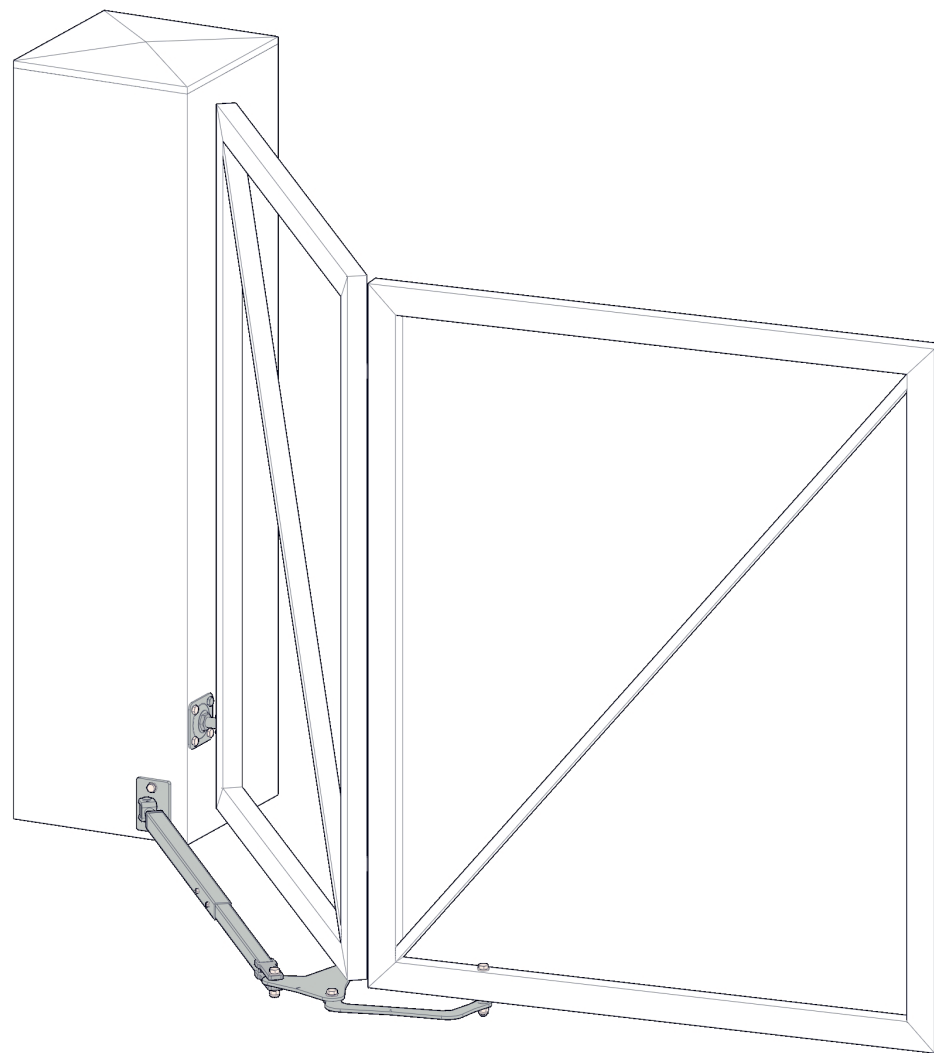



www.cais.eu